
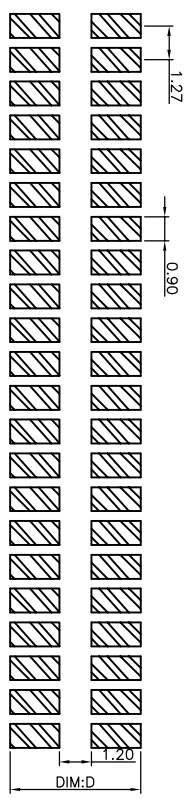
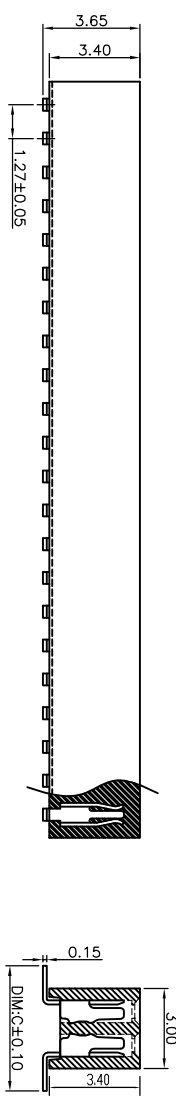


REV.	ECN/DESCRIPTION	BY	DATE
0	NEW RELEASE	XXX	XX/XX/XX

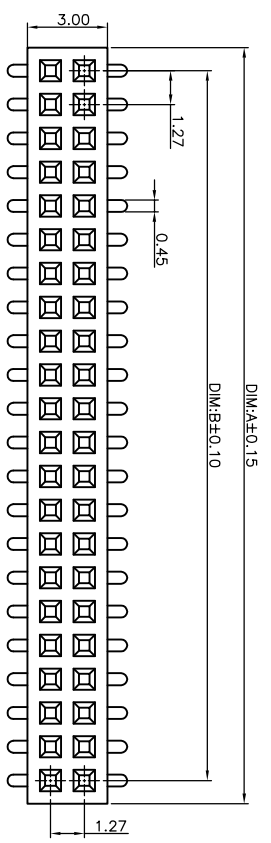

N(Pin)	Dim A	Dim B	Dim C	Dim D	N(Pin)	Dim A	Dim B	Dim C	Dim D
			4.5						
			4.7						
			5.0						
			5.4						

NOTES:
SPECIFICATION:
 Current Rating:1.0Ampere Contact
 Contact Resistance:20Milliohm Max
 Insulation Resistance:1000Megohm Min
 Dielectric Withstanding Voltage:500V AC Min
 Operation Temperature:-40°C~+105°C
Material:
 Contact Material:Phosphor Bronze
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Glass Filled Polyester(UL94V-0)
 Standard:PB1,PA46,PA67...

Recommended P.C.Board Layout

CUSTOMER DRAWING		GENERAL TOLERANCES UNLESS SPECIFIED		APPROVED BY:		TITLE:	
SIZE A4	UNITS MM[INCH]	X±0.20 X±0.15	X° ±5.0° X° ±3.0°	XXXXXXXX		1.27*3.4 SMT 22PIN Double Row	CNKETE TEL: 0755-81469598 FAX: 0755-81469568 http://www.szlete.com
				CHECKED BY: XXXXXXXX		PART NO.: XXXXXXXX	深圳市科特精密五金塑胶有限公司 Shen Zhen CNKETE Precision hardware plastic co., LTD 深圳市宝安区石岩镇洲石路方大工业园栋1楼